

```

[parameters]
#select receiver module id for the message ('all' for all modules)
set_receiver = all

#sensor amplitude range - 2, 4 or 8 g
set_amplitude = 2

#sensor sample rate - 100, 250, 500, or 1000 Hz
set_sample_rate = 1000

#measured axes - xyz, x, y or z
set_axes = xyz

#maximum measurement duration in seconds - e.g. 10.3
set_max_duration = 25.0

#default calibration values of a module - used as a divisor of the sensor data - e.g. 25.6
#the calibration values are for 2g amplitude range and multiplied for other amplitudes
set_calibration_value_x = 26.0
set_calibration_value_y = 26.0
set_calibration_value_z = 26.0

[trimming values]
#these are used for trimming the raw data of the acceleration values
#another file is created with '_trim' suffix

#select if trimming is used - e.g. True or False
set_trimming = True

#select highpass filtering - e.g. from 0.0 to sample_rate/2
set_highpass = 0.4

#select lowpass filtering - e.g. from 0.0 to sample_rate/2
set_lowpass = 0.0

```

Figure2. The used configuration to evaluation of Simple DAQ [1]

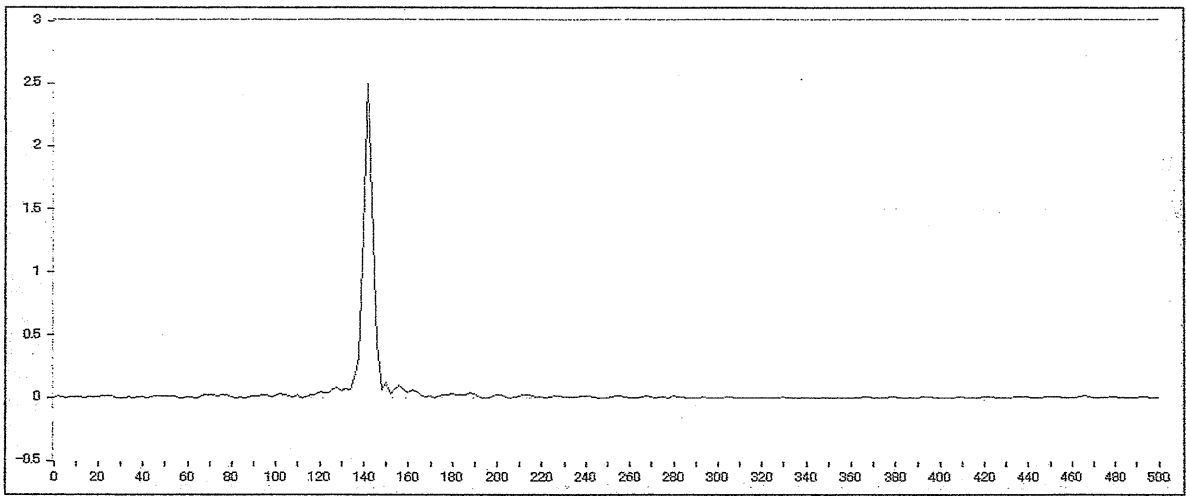


Figure 4. Result of FFT (All axis)

5. Idea of the scheme of the wireless measuring system

a_{hv} and $A(8)$ are measured and calculated inside of the node. Nodes in work place warn instantly to an operator in case of over dose to vibration.

Warning is received by not only the operator in workplace but also the administrator vibration tools that is monitoring PC. The example is shown by Node 5 of Figure 7.

PC logs the a_{hv} and $A(8)$ history each nodes with software for the administrator vibration tools to control and manage by company.

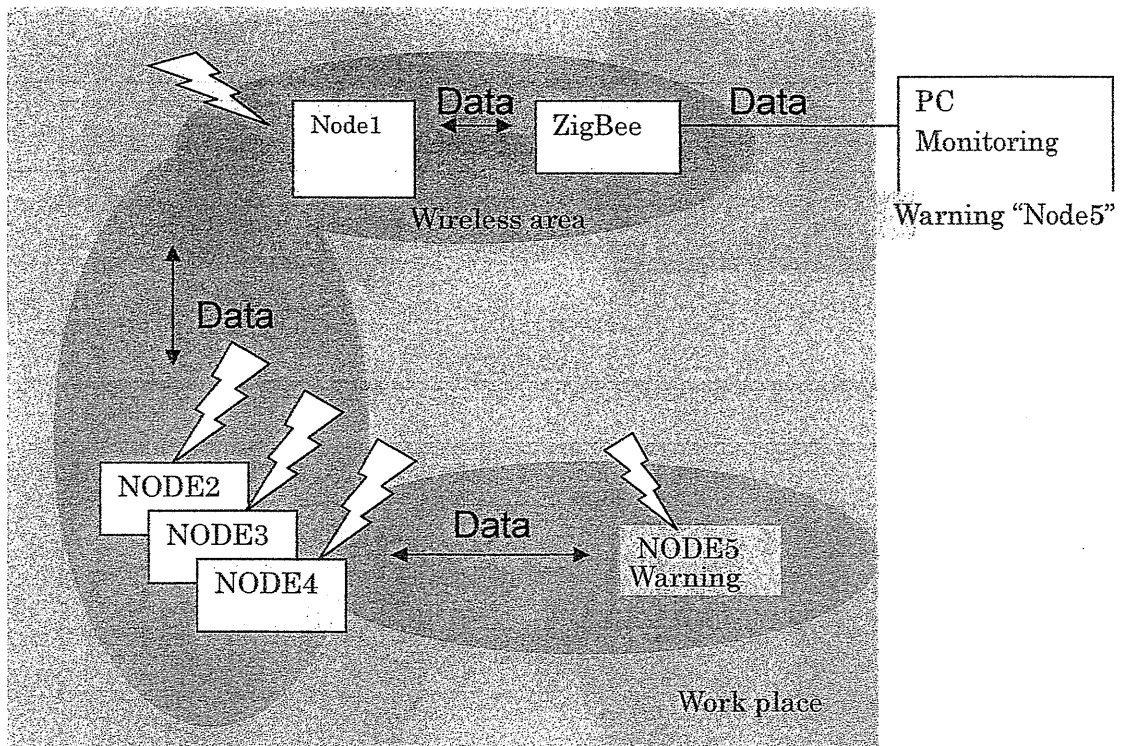


Figure7. An ideal scheme

6. Current Issues of the wireless measuring system

From an ideal scheme and the test results, it is clear to following things;

- a. The nodes are necessary to be build as a router (FDD) which is defined by ZigBee Alliance to forward the data cooperatively.
- b. It is necessary to calculate a_{hv} and $A(8)$ in the local node to let an operator know exposure value.
- c. It is necessary to make GUI software using provided API from vender for easy to use to the administrator of vibration tools.

7. Conclusion

Frequency response of currently used Simple DAQ is still too low to apply to the hand –arm vibration by result of evaluation. However, the technology of MEMS accelerometer for frequency response has been progressed much faster to higher frequency. There is already provided the MEMS accelerometer to applicable hand-arm vibration from the other study.

To control the vibration exposure in the field, this kind of system which is shown by Figure7 is going to be necessary for the operator in the field of vibration environment and for administrator of vibration tools.

Reference

- [1] Simple DAQ A Wireless Vibration Data Acquisition System Version 1.0 User Guide

The 19th Japan Conference on Human Response to Vibration (JCHRV2011)

Nagoya University, Nagoya, Japan

August 8 - 10, 2011

**Transition of Frequency-Weighting Curves of
Hand-Arm Vibration Evaluation**

¹ Setsuo Maeda, ² Serap Guner Geridonmez, ³ Kazuhisa Miyashita,

⁴ Kazuma Ishimatsu

¹ Department of Applied Sociology, Kinki University

3-4-1 Kowakae, Higashiosaka 577-8502, JAPAN

² Department of Engineering Sciences, Middle East Technical University

Ankara 06531, TURKEY

³ Department of Hygiene, School of Medicine, Wakayama Medical University

811-1, Wakayama, 641-8509, JAPAN

⁴ Master Course of Management in Health Care Sciences

Graduate School of Health Care Sciences, Jikei Institute

1-2-8, Miyahara, Yodogawa-ku, Osaka 532-0003, JAPAN

Abstract

In the ISO/TC108/SC4/WG3, the new frequency-weighting curve has been considered to revise the ISO 5349-1 standard as PWI 18570: HAV frequency weighting. Moreover, many frequency-weighting curves based on the biodynamic responses or on the epidemiological data of the hand-arm vibration experiments are proposed by many researchers. In this study, the history of Frequency-Weighting curves of Hand-Arm Vibration Evaluation was investigated.

1. Introduction

In the ISO/TC108/SC4/WG3, the new frequency-weighting curve has been considered to revise the ISO 5349-1 standard as PWI 18570: HAV frequency weighting. Moreover, many frequency-weighting curves based on the biodynamic responses or on the epidemiological data of the hand-arm vibration experiments are proposed by many researchers. And the Frequency-Weighting Curves of ISO 5349 on 1979 [1], 1986 [2], 1996 [3], 1997 [4], 1999 [5], 2000 [6], and 2001 [7] are defining by the different standard for evaluating the Hand-Arm Vibration. Also, the Frequency-Weighting Curves have been

discussed by ISO/TC108/SC4/WG3 meetings in Malta 2007 [8], Oslo 2008 [9], Las Vegas 2009 [10], London 2010 [11], and Ottawa 2011 [12].

The purpose of this research is to summarize the history of the Frequency-Weighting curves from 1979 to 2011.

2. Frequency-Weighting Curves of ISO/DIS 5349:1979 [1] and ISO 5349: 1986 [2]

The frequency-weighting curves have been defined by ISO/DIS 5349 [1] and ISO 5349 [2].

The frequency-weighting factors are also defined by the Table 1 and 2.

Table 1 – Weighting factors for conversion of one-third octave band measurements to weighted measurements of ISO/DIS 5349 [1] and ISO 5349 [2].

Frequency Hz	Weighting factor
6.3	1.0
8.0	1.0
10.0	1.0
12.5	1.0
16	1.0
20	0.8
25	0.63
31.5	0.5
40	0.4
50	0.3
63	0.25
80	0.2
100	0.16
125	0.125
160	0.1
200	0.08
250	0.063
315	0.05
400	0.04
500	0.03
630	0.025
800	0.02
1000	0.016
1250	0.0125

Table 2 – Weighting factors for conversion of octave band measurements to weighted measurements of ISO/DIS 5349 [1] and ISO 5349 [2].

Frequency Hz	Weighting factor
8.0	1.0
16.0	1.0
31.5	0.5
63	0.25
125	0.125
250	0.063
500	0.03
1000	0.016

The ISO/DIS 5349 [1] and ISO 5349 [2] standards are recommended that the vibration should be investigated in each of the three coordinate axes and that the assessment should be based upon the component with largest vibration acceleration. Dose-response relationships have been studied for industrial vibration exposure which involves complex three-dimensional acceleration. Characterization of the vibration exposure through the largest single component is generally regarded as adequate on these standards.

3. Frequency-Weighting Curves of ISO 5349-1 standards

The following Tables are shown the frequency-weighting factors of different standards.

Table 3 – Weighting factors for conversion of octave band measurements to weighted measurements of ISO/CD 5349-1:1996 [3].

Frequency Hz	Weighting factor
8	1
10	1
12.5	1
16	1
20	0.8
25	0.63
31.5	0.5
40	0.4
50	0.3
63	0.25
80	0.2

100	0.16
125	0.125
160	0.1
200	0.08
250	0.063
315	0.05
400	0.04
500	0.03
630	0.025
800	0.02
1000	0.016

Table 4 – Weighting factors for conversion of octave band measurements to weighted measurements of ISO/CD 5349-1:1997 [4].

Frequency Hz	Weighting factor
8	1
10	1
12.5	1
16	1
20	0.8
25	0.63
31.5	0.5
40	0.4
50	0.3
63	0.25
80	0.2
100	0.16
125	0.125
160	0.1
200	0.08
250	0.063
315	0.05
400	0.04
500	0.03
630	0.025
800	0.02
1000	0.016

Table 5 – Weighting factors for conversion of octave band measurements to weighted measurements of ISO/DIS 5349-1:1999 [5].

Frequency Hz	Weighting factor
6.3	0.727
8	0.873
10	0.951
12.5	0.958
16	0.896
20	0.782
25	0.647
31.5	0.519
40	0.411
50	0.324
63	0.256
80	0.202
100	0.160
125	0.127
160	0.101
200	0.0799
250	0.0634
315	0.0503
400	0.0398
500	0.0314
630	0.0245
800	0.0186
1000	0.0135
1250	0.00894

Table 6 – Weighting factors for conversion of octave band measurements to weighted measurements of ISO/FDIS 5349-1:2000 [6].

Frequency Hz	Weighting factor
6.3	0.727
8	0.873
10	0.951
12.5	0.958
16	0.896
20	0.782
25	0.647
31.5	0.519
40	0.411
50	0.324
63	0.256
80	0.202
100	0.160
125	0.127
160	0.101
200	0.0799
250	0.0634
315	0.0503
400	0.0398
500	0.0314
630	0.0245
800	0.0186
1000	0.0135
1250	0.00894

Table 7 – Weighting factors for conversion of octave band measurements to weighted measurements of ISO 5349-1:2001 [7].

Frequency Hz	Weighting factor
6.3	0.727
8	0.873
10	0.951
12.5	0.958
16	0.896
20	0.782
25	0.647
31.5	0.519
40	0.411
50	0.324
63	0.256
80	0.202
100	0.160
125	0.127
160	0.101
200	0.0799
250	0.0634
315	0.0503
400	0.0398
500	0.0314
630	0.0245
800	0.0186
1000	0.0135
1250	0.00894

The Frequency-Weighting factors are different between ISO/CD 5349-1: 1996, ISO/CD 5349-1: 1997 and ISO/DIS, FDIS 5349-1:1999-2001. But, from 1996 standard of ISO 5349-1, the measurements should be made for all three directions by using the frequency-weighting as shown in Tables 3-7. The frequency-weighted r.m.s. acceleration values for the x-, y- and z-axes, a_{hw_x} , a_{hw_y} and a_{hw_z} , shall be reported separately. The evaluation of vibration exposure is based on a quantity that combines all three axes. This is the vibration total value, a_{hv} , and is defined as the root-sum-squares of three component values:

$$a_{hv} = \sqrt{a_{hw_x}^2 + a_{hw_y}^2 + a_{hw_z}^2}$$

4. Histories of ISO/TC108/SC4/WG3 meetings

The report of the ad-hoc WG3 meeting held in St. Julians, Malta in October 2007 was summarized by the convenor [8].

1. Wh (defined in ISO 5349-1) was based on research by Miwa in the 1960s.
2. Evidence that “flat” weighting better predicts vascular and sensorineural HAVS risks.
3. New information had come forward from the European VIBRISKS project.
4. France proposed adding an informative Annex to ISO 5349-1:2001 define a procedure for measuring “unweighted vibration”. Careful consideration of the bandwidth would be needed.
5. Dr Maeda (Japan) was suggested as Project Leader.
6. Dr Maeda started work on ISO/PWI 18570. Issued questionnaire to WG experts.
7. Change of responsibilities means that Dr Maeda has to step down as ISO/PWI 18570 project leader.

The report of ISO/TC108/SC4/WG3 meeting held in Oslo in September 2008 was summarized by the convenor [9].

1. The meeting agreed that the current Wh is well used, and embedded in national legislation and national and international standards. Short-term change of Wh was recognized as being unlikely.
2. It was agreed that additional (alternative) weighting were desirable, but that current knowledge is insufficient to justify any specific weightings.
3. It was noted the justification for change must come from material based on a range of specialist inputs, including;
 - A: Biodynamics
 - B: Epidemiologists
 - C: Physiologists
 - D: Pathologists
4. Canadian delegation informed the meeting that the 12th International Conference on Hand-Arm Vibration is planned for Ottawa in 2011. In conjunction with this the organizer is intending to organize a meeting of experts to discuss and move progress developments of the hand-arm frequency weightings.

The report of ISO/TC108/SC4/WG3 meeting held in Las Vegas in September 2009 was summarized by the convenor [10].

1. The convenor presented a review of PWI 18570 activities since the Oslo meeting, i.e. the development of the frequency weightings defined in document N196”Candidate Supplementary Frequency Weightings”.
2. The importance of understanding the history of the current frequency weighting Wh.
3. That Wh has been around for over 40 years and is now embedded in standards and

national legislation.

4. There is no need to remove Wh as it attempts to assess the whole hand-arm vibration risk.
5. New frequency weightings may have specific functions, e.g. for sensorineural, vascular and musculoskeletal issues.

RESOLUTION 1: The working group agreed to continue working with the current candidate frequency weighting (doc N196), and to continue to encourage working group members and other experts to contribute to the debate on hand-arm vibration frequency weightings.

RESOLUTIONS 2: To ask for additional information from Germany to explain the basis for the methodology used in VDI 2057.

RESOLUTIONS 3: The convenor to ask Professor Bovenzi to establish whether his data could be re-analyzed using the candidate frequency weightings Whf and WhT.

The report of ISO/TC108/SC4/WG3 meeting held in London in September 2010 was summarized by the convenor [11].

There was a useful discussion on the options and issues of a new frequency weighting. Some of the views expressed were:

1. The importance of good quality measurement when considering high-frequency vibration.
2. Low-frequency compared to high-frequency may not be a good way of considering issues, better to consider musculoskeletal and vascular/neurological risks.
3. Wh must stay, need an alternative Perhaps and annex to ISO 5349-1.
4. Where is the evidence of failing of Wh? Wh has been effective reducing exposures and risk for many machines. Need more evidence before providing an annex.
5. Bovenzi work on limited machines, not a clear-cut outcome.
6. Concern about possible confusion of new weighting in ISO 5349-1 (informative or not)
7. Possible better as a Technical Report or Technical Specification.
8. Four issues affecting risk: vibration magnitude, ergonomics, environmental and personal factors. Vibration magnitude may not be the most important.

RESOLUTIONS 1: The working group agrees that there is now sufficient information to propose an additional frequency weighting for hand-arm vibration that may be a better indicator of risks of neurological and vascular effect and agree to advance PWI 18570 to begin developing a document on this topic. The project leader for this work will be Tony Brammer supported by Ren Dong.

The report of HAV2011 Workshop for Frequency Weighting held in Ottawa, Canada in June 2011 was summarized [12].

1. Evidence that "flat" weighting better predicts vascular and sensorineural HAVS risks.
2. The meeting agreed that the current Wh is well used, and embedded in national

legislation and national and international standards. Short-term change of Wh was recognized as being unlikely.

3. It was noted the justification for change must come from material based on a range of specialist inputs, including;

A: Biodynamics

B: Epidemiologists

C: Physiologists

D: Pathologists

E: Psychologists

5. Conclusions

From the results of summary of the ISO/TC108/SC4/WG3, it was clear that one researcher's work was on limited machines, and not a clear-cut outcome. Therefore, it was found the justification for change must come from evidences based on a range of specialist inputs.

6. References

[1] International Organization for Standardization (1979) Mechanical vibration – Guideline for the measurement and the assessment of human exposure to hand-transmitted vibration, ISO/DIS 5349.

[2] International Organization for Standardization (1986) Mechanical vibration – Guideline for the measurement and the assessment of human exposure to hand-transmitted vibration, ISO 5349.

[3] International Organization for Standardization (1996) Mechanical vibration – Guideline for Measurement and assessment of human exposure to hand-transmitted vibration-Part 1: General guidelines, 1st Committee Draft ISO/CD 5349-1.

[4] International Organization for Standardization (1997) Mechanical vibration – Guideline for Measurement and assessment of human exposure to hand-transmitted vibration-Part 1: General guidelines, 2nd Committee Draft ISO/CD 5349-1.

[5] International Organization for Standardization (1999) Mechanical vibration – Guideline for Measurement and evaluation of human exposure to hand-transmitted vibration-Part 1: General guidelines, ISO/DIS 5349-1.

[6] International Organization for Standardization (2000) Mechanical vibration – Guideline for the measurement and the assessment of human exposure to hand-transmitted vibration-Part 1: General guidelines, ISO/FDIS 5349-1.

[7] International Organization for Standardization (2001) Mechanical vibration – Guideline for the measurement and the assessment of human exposure to hand-transmitted vibration – Part 1: General requirements, ISO 5349-1.

[8] ISO/TC108/SC4/WG3 N183 (2007)

[9] ISO/TC108/SC4/WG3 N194 (2008)

[10] ISO/TC108/SC4/WG3 N208 (2009)

[11] ISO/TC108/SC4/WG3 N219 (2010)

[12] ISO/TC108/SC4/WG3 N222 (2011)

The 19th Japan Conference on Human Response to Vibration (JCHRV2011)

Nagoya University, Nagoya, Japan

August 8 - 10, 2011

Implementation and Influences of Machinery Safety Directive of 2006/42/EC

Setsuo Maeda

Department of Applied Sociology
Kinki University
3-4-1 Kowakae,
Higashiosaka 577-8502, Japan
maeda@socio.kindai.ac.jp

Thomas Koch

Department of Agriculture
Kinki University
3327-204 Naka-machi,
Nara 631-8505,
Japan

Abstract

The purpose of this paper is to introduce the implementation and application of the new Machinery Safety Directive of 2006/42/EC for preventing Hand-Arm Vibration Syndrome to Japanese tools manufacturers.

1. Introduction

Figure 1 shows the relationships among Machinery Directives, the EU directive, International Standards and National Standards. The goal of this directive is to introduce measures that promote the improvement of worker's health and safety in the workplace. It provides for a general framework that executes European principles while at the same time honoring common international principles.

The guiding principles of the content are as follows.

- 1) This directive applies to the activities of all public and private sections.
- 2) The employer's responsibilities
- 3) Responsibilities of workers and workers rights

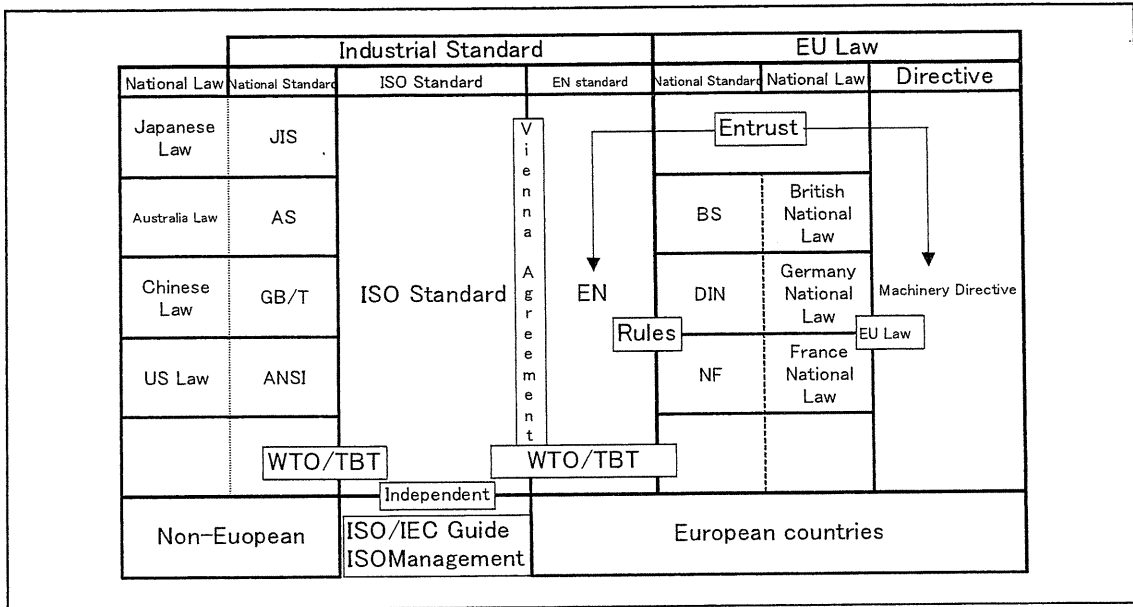


Figure 1. The relationships among Machinery Directives, EU Directives, International Standards and National Standards

As a result of the market integration of Europe, standards were adopted through the "Framework instructions", which included Machinery Directive 2006/42/EC and labor safety hygiene listed as Board of Director's Instruction 89/391/EC. Board of Director's Instruction 89/391/EC introduced measures to promote the improvement of labor safety hygiene and was revised in Board of Director's Instruction 98/37/EC: (1998). These two directives are the foundation of EC safety hygiene policy. These directives stipulate that in the design and the production of machines, it is mandated that consideration be given to both limiting the dangers associated with vibration in the vibratory source and improved methods that would allow workers to use the machines in ways that minimize injury. The vibration in the tool or equipment should be suppressed to the lowest level consistent with the presently available vibration reduction technology. The Machinery Directive 89/37/EC has been revised in Machinery Directive 2006/42/EC. EU countries were required to revise their laws to conform to the latest Machinery Directive for preventing Hand-Arm Vibration Syndrome.

The purpose of this paper is to clarify and encourage the implementation and application of the Machinery Safety Directive 2006/44/EC by Japanese tool manufacturers.

2: Machinery Safety Directive 98/37/EC of the European Parliament and of the Council of the European Union of 22 June 1998 on the implementation of the laws of Member States relating to machinery. (Machinery Safety Directive)

Vibration

Machinery must be so designed and constructed so that risks resulting from vibration produced by machinery are reduced to the lowest possible level by incorporating the latest technologies for reducing

vibration that are available. It is important for designers and manufacturers that the vibration reduction takes place in the machinery at the source of the vibration.

Apart from the minimum requirements set out in 1.7.4 of this Directive, the instruction handbook must contain the following information:

The manufacturer's instructions must provide the following information concerning vibrations transmitted by hand-held and hand-guided machinery:

— the weighted root mean square acceleration value, to which the arms are subjected, if it exceeds 2.5 m/s^2 as determined by the appropriate test code. Where the acceleration does not exceed 2.5 m/s^2 , this must be mentioned.

If there is no applicable test code, the manufacturer must indicate the measurement methods and conditions under which measurements were made.

3. Machinery Safety Directive 2006/42/EC [6]

As mentioned above, machinery must be so designed and constructed so that risks resulting from vibration produced by machinery are reduced to the lowest possible level by incorporating the latest technologies for reducing vibration that are available. It is important for designers and manufacturers that the vibration reduction takes place in the machinery at the source of the vibration.

The level of vibration emission may be assessed with reference to comparative emission data for similar machinery.

The instructions must include the following information concerning vibration transmitted by portable handheld and hand-guided machinery:

- **the vibration total value** to which the hand-arm system is subjected, if it exceeds $2,5 \text{ m/s}^2$. Where this value does not exceed $2,5 \text{ m/s}^2$, this must be mentioned,
- the uncertainty of measurement.

These values must be either those actually measured for the machinery in question or those established on the basis of measurements taken for technically comparable machinery which is representative of the machinery to be produced. If harmonized standards are not applied, the vibration data must be measured using the most appropriate measurement code for the machinery. The operating conditions during measurement and the methods used for measurement, or the reference of the harmonized standard applied, must be specified.

Directive 98/37/EC (Machinery Safety Directive) or 2006/42/EC and Directive 2002/44/EC (Physical Agent Directive-Vibration) have been in force since December 29th 2009 and July, 2005 respectively, and thus, the effort target value of the vibration reduction are well established and have been incorporated by hand-transmitted vibration tool manufacturers. The manufacturers use international standards and make international adjustments to test and classify the hand-transmitted vibration value tools. Moreover, the company has the additional obligation to protect the worker from possible danger to

ensure safety and health while exposed to mechanical vibration caused by the equipment or situation. Therefore, a hand-held power tool manufacturer should measure the tool vibration value based on international test standards before the tool can be made available to consumers, and declare the vibration value so that the user may perform a risk assessment of the tool. Moreover, tool manufacturers are required to evaluate the safety of each tool, and to meet the machine instruction standards.

The EU Commission is expected to make the guidelines provided in the Machinery Directive legally mandatory within three years after publishing the instructions as a legal notice in the official gazette as stipulated by EU law. These Machinery Directives are mandating the necessary standards that machine-made goods and similar products must achieve without specifying the technology companies may utilize. The result is that the EU and EFTA (European Free Trade Association) will conform to an EN standard assuming that necessary the regulations are implemented, supplemented and supported by CEN (European Committee for Standardization) and CENELEC (European Electric Standardization Committee). The EN standard then is adopted by each EU country as a national standard under the bylaws of CEN and CENELEC. Moreover, this EN standard is offered as a proposed agreement in Vienna as an ISO standard, and the ISO standard becomes a national standard in countries that are members of the WTO when an agreement is reached through the WTO/TBT (World Trade Organization)/TBT(Technical Barriers to Trade) (Agreements concerning technical barriers to trade).

In March of 2006, the Ministry of Health, Labour and Welfare appointed a special committee to examine work management for the prevention of hand-arm vibration syndrome. This committee recommended adopting the EU Directive of MSD and PAD (Vibration) principles in the committee's final report in 2007. On 10th of July 2009, the Ministry of Health, Labour and Welfare published the following 4 guidelines [1]-[4]:

- 1: LSB (Labour Standards Bureau) Issue No.0710-1
Guidelines for Handling Chain Saws
- 2: LSB (Labour Standards Bureau) Issue No.0710-2
Guidelines for Preventive Measures against Vibration Hazards in Work with Vibratory Tools other than Chain Saws
- 3: LSB (Labour Standards Bureau) Issue No.0710-3
Management and Indication of Vibration Total Value of Frequency-Weighted r.m.s. Acceleration of individual tools
- 4: LSB (Labour Standards Bureau) Issue No.0710-5
Promotion of Comprehensive Measures against Vibration Hazards

The tool manufacturers had to declare the vibration magnitude of individual tools according to the LSB (Labour Standards Bureau) Issue No.0710-3.

4. Difference between 98/37/EC and 2006/42/EC

Vibration Magnitude of Tools (The responsibility of the manufacturers)

The responsibility of the manufacturers is regulated according to Machinery Directive (98/37/EC) which

was later reissued as (2006/42/EC) in December 2009. All manufacturers have to declare the vibration total value of frequency-weighted r.m.s. acceleration of the individual tool. The manufacturers also have to follow two methods of deriving the vibration total value of frequency-weighted r.m.s. acceleration of the individual tool:

In order for these measures to be adopted by the businesses whose workers use vibratory tools, vibratory tool manufacturers need to measure and declare the "the vibration total value of frequency-weighted r.m.s. acceleration" of such tools.

With regard to vibratory tools, the "the vibration total value of frequency-weighted r.m.s. acceleration" shall be measured and calculated as follows:

Vibration acceleration shall be measured (hereinafter referred to as "vibration measurement") and declared conforming with the following notes and applicable measuring standards from orders ISO 8662 or ISO 28927-series, ISO 22867, EN 60745, and EN 50144.

Considering the above, vibratory tools shall comply with the measuring standards, such as test protocols, specified in Table 1.

Table 1 Test protocols for declaring the vibration magnitude of individual tool.

Tool		Applicable Measuring Standard		
1	Chain saws	ISO 22867:2004	EN 60745-2-13	
2	Tools having a piston striking mechanism	1 Rock drill	ISO 28927-10:ISO 8662-3;JIS B7762-3:2006	EN 60745-2-6
		2 Chipping hammer	ISO 28927-10:ISO 8662-2;JIS B7762-2:2006	EN 60745-2-6
		3 Riveting hammer	ISO 28927-10:ISO 8662-2;JIS B7762-2:2006	EN 60745-2-6
		4 Caulking hammer	ISO 28927-10:ISO 8662-2;JIS B7762-2:2006	EN 60745-2-6
		5 Hand hammer	ISO 28927-10:ISO 8662-2;JIS B7762-2:2006	EN 60745-2-6
		6 Baby hammer	ISO 28927-10:ISO 8662-2;JIS B7762-2:2006	EN 60745-2-6
		7 Concrete breaker	ISO 28927-10:ISO 8662-5;JIS B7762-5:2006	EN 60745-2-6
		8 Scaling hammer	ISO 28927-10:ISO 8662-2;JIS B7762-2:2006	EN 60745-2-6
		9 Sand rammer	ISO 28927-6:ISO 8662-9;JIS B7762-9:2006	EN 60745-2-6
		10 Pick hammer	ISO 28927-10:ISO 8662-5;JIS B7762-5:2006	EN 60745-2-6
		11 Multi-needle chisel	ISO 28927-9:ISO 8662-14;JIS B7762-14:2006	EN 60745-2-6
		12 Auto scraper	ISO 28927-10:ISO 8662-2;JIS B7762-2:2006	EN 60745-2-6
		13 Electric hammer	ISO 28927-10:ISO 8662-5;JIS B7762-5:2006	EN 60745-2-6

3	Tools having an internal combustion engine (portable)	1	Engine cutter	ISO 28927-8:ISO B7762-12:2006	ISO 8662-12;JIS	
		2	Bush cleaner	ISO 22867:2004		
4	Rotating tools	1	Portable stripper	ISO 28927-10:ISO B7761-2:2004	ISO 8662-2;JIS	
		2	Sander	ISO 28927-3:ISO B7762-8:2006	ISO 8662-8;JIS	EN 60745-2-3 EN 60745-2-4
		3	Vibration drill	ISO 28927-5:ISO B7762-6:2006	ISO 8662-6;JIS	EN 60745-2-1
5	Tools having a built-in vibrator	1	Portable tie tamper	ISO 28927-6:ISO B7762-9:2006	ISO 8662-9;JIS	
		2	Concrete vibrator	EN 60745-2-12		JIS B7761-2:2004
6	Portable grinders (with grinding stones over 150 mm in diameter)			ISO 28927-1:ISO B7762-4:2006	ISO 8662-4;JIS	EN 60745-2-3
	Swing grinders (with grinding stones over 150 mm in diameter)			ISO 28927-10:ISO B7761-2:2004	ISO 8662-2;JIS	
7	Desktop or floor-type grinders (with grinding stones over 150 mm in diameter)			ISO 28927-8:ISO B7761-2:2004	ISO 8662-12;JIS	
8	Clamping tool	1	Impact wrench	ISO 28927-2:ISO B7762-7:2006	ISO 8662-7;JIS	EN 60745-2-2
9	Reciprocating tools	1	Vibration shear	ISO 28927-7:ISO B7762-10:2006	ISO 8662-10;JIS	EN 60745-2-8
		2	Jigsaw	ISO 28927-8:ISO B7762-12:2006	ISO 8662-12;JIS	EN 60745-2-11

(1) The vibration total value of frequency-weighted r.m.s. acceleration [7] by test protocol;

This test protocol is used by vibration tool manufacturers. The measurement of the tool vibration value based on the test protocol is performed using the International Standards as shown in Table 1, and the manufacturers must provide users with a declaration value of the vibration value from the vibration tool before the tool can be put on the market. As for this declaration value, it is necessary to obtain a vibration value that conforms to international standards so that the testing methods and the vibration evaluations of the hand-held vibration tool are consistent regardless of the country where the tests are conducted.

(2) The vibration total value of frequency-weighted r.m.s. acceleration by measurement in the workplace;

The vibration total value of frequency-weighted r.m.s. acceleration from hand-held vibration tools cannot be specified according to the vibration value obtained by the test protocol such as the International Standards as shown Table 1. It is necessary to evaluate the physical value of the vibration tool in the workplace according to the ISO 5349-2 standard [8].

4.1 Vibration measurement in accordance with ISO 8662.

Some parts of the ISO 8662 series prescribe measurement on a single axis, "Z" axis or priority axis (the axis of the greatest vibration value among the three orthogonal axes). The three axes shall be measured simultaneously to obtain a vibration synthetic value. If the three-axis simultaneous measurement is difficult, it shall be permissible to calculate a synthetic vibration value from the results of measuring the three axes sequentially under the same measuring conditions. If the single-axis measurement database on ISO 8662, etc. is available for a vibratory tool, it shall also be permissible to obtain the vibration total value of frequency-weighted r.m.s. acceleration by conversion where the applicable single-axis value is multiplied by 1.7. When presenting the applicable value in an instruction manual or on a website, it shall be stated clearly that the value is a product of multiplying the single-axis value by 1.7. Refer to the following multipliers in Table 2. Multipliers are given in CEN/TR 15350:2006, "Mechanical vibration – Guideline for the assessment of exposure to hand-transmitted vibration using available information including that provided by manufacturers of machinery."

Table 2 Multipliers are given in CEN/TR 15350:2006

1 Tool type	2 Vibration test code	3 Real work task considered	4 Correction factor
Riveting hammer	ISO 8662-2	Riveting, cutting	1.5
Chipping hammer		Fettling, scaling, other applications	2
Rotary hammer	ISO 8662-3	Hammer drilling	2
Rock drill		chiselling	
Grinder(pneumatic)	ISO 8662-4	Grinding, cutting	1.5
Grinder(electric)	EN 50144-2-3	Grinding, cutting	1.5
		Polishing	Value in use likely to be lower
Pavement breaker	ISO 8662-5	Breaking concrete	2
Construction hammer		Breaking asphalt	1.5
Impact drill	ISO 8662-6	Impact drilling	1.5
Impact wrench	ISO 8662-7		1.5
Impulse tool		Tightening bolts	
Ratcheting screwdriver			
Polisher	ISO 8662-4	Polishing	1.5
Rotary sander		Rotary sanding	
Orbital sander		Orbital sanding	
Random orbital sander		Random orbital sanding	
Rammer	ISO 8662-9	Ramming	1.5
Nibbler	ISO 8662-10		1.5
Shears		Cutting sheet metal	
Fastener driving tool	ISO 8662-11	Driving fasteners every 3s	1.5
Saw	ISO 8662-12		1.5
File		Machining wood or steel	
Straight die grinder	ISO 8662-13		1.5
Angle die grinder		Using burrs or mounted points	
Needle scaler	ISO 8662-14		2
Stone working tool		Cleaning weld	

In Japan, if the manufacturer's declared values have been measured by using the JIS 7762 series: 2006 standards or the ISO 28927-series, or the EN 60745:2006 series or EN 50144 series, it will be "the vibration total value of frequency-weighted r.m.s. acceleration". Therefore, these manufacturers' do not need to apply the multipliers to the declared values to get the vibration total value of frequency-weighted r.m.s. acceleration. ISO 8662 series has been changed to ISO 28927 series. All tool manufacturers in Japan have to follow the vibration test protocols according to the ISO 28927 series for getting the